



nl en fr de es it pt

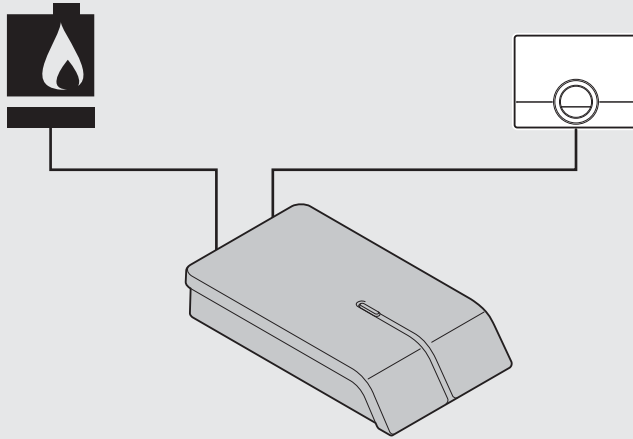

AD-2000001-01

Input	24V, 4W
R-BUS	24V, 100mA
ON/OFF	Max. 70W 30 VDC 230VAC
Open Therm	4.0 compliant
Temperature	0°C - 60°C
Insulation Class	IP21
 ON / OFF OPEN THERM	

**Installatiehandleiding - Installation manual - Manuel d'installation
Installationsanleitung - Manual de instalación
Manuale d'installazione - Instalação manual**

Gateway 16

- Lees en bewaar deze handleiding
- Read and keep this manual
- Lire et conservez ce manuel


- Bitte diese Anleitung lesen und aufbewahren
- Leia e guarde este manual

- Leggi e conserva questo manuale
- Lea y mantenga esta manual


Inhoud doos - Set contents - Composition du kit - Set Inhalt
Contenido - Contenido del kit - Conteúdos

1

A




B




6 mm x 30 mm

C




E




AD-2000002-01

2

A




B




6 mm x 30 mm





D

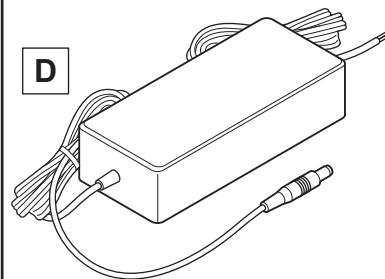

E



AD-2000017-01

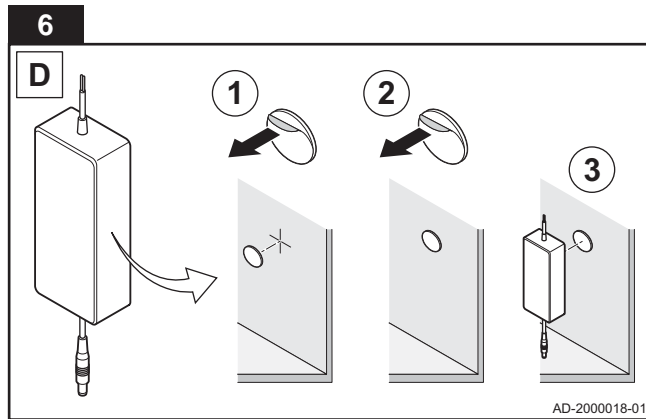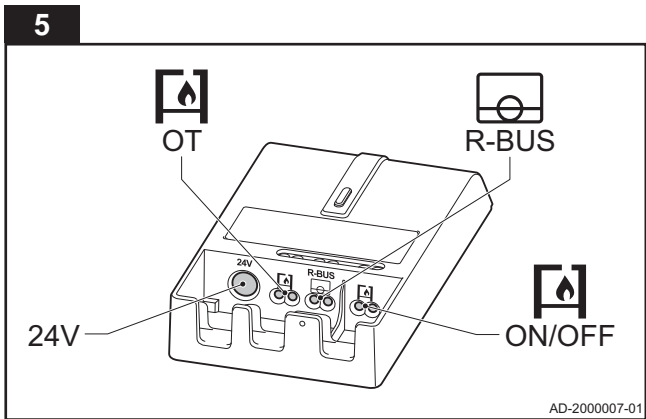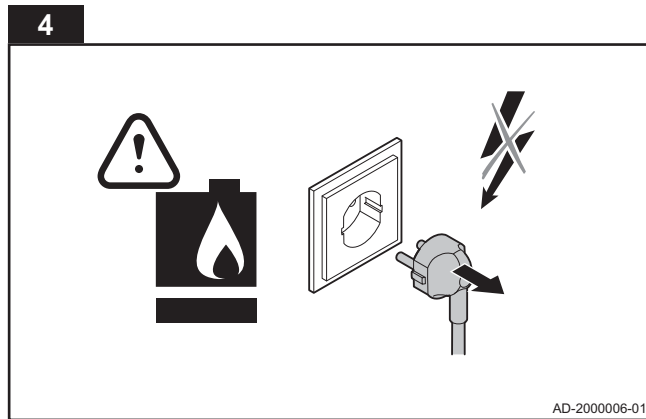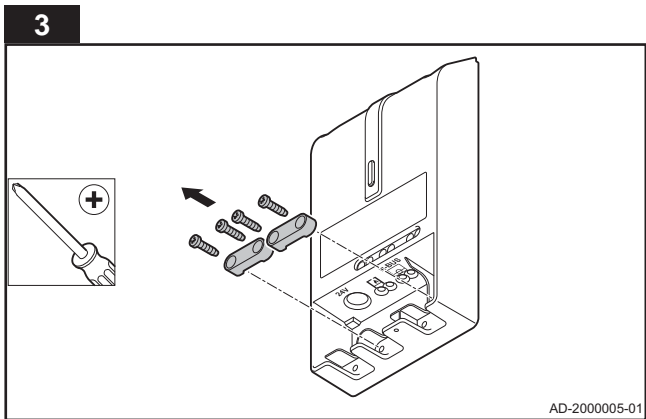

7

Aansluitconnector:

Terminal-connector:

Connecteur:

Schraubklemme:

Conectores:

Morsettiera - Connettore:





Conectores:

1: 24V Power supply

2: OT controlled boiler


3: Room Unit

4: ON/OFF controlled boiler

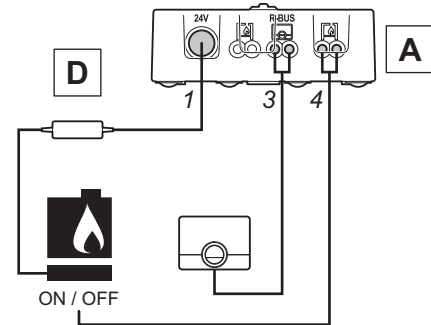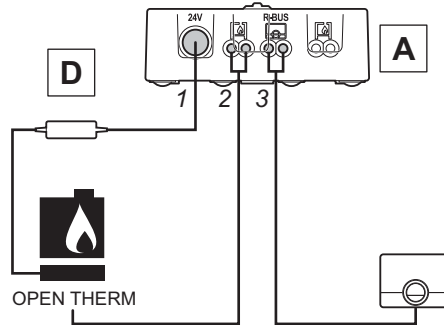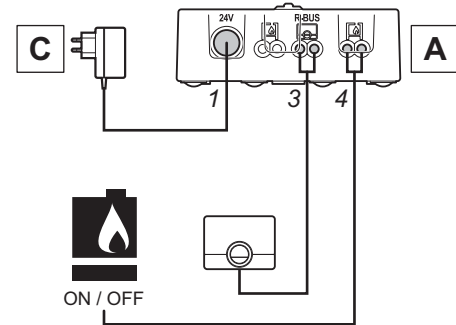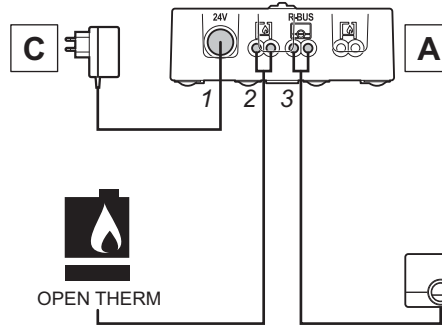


AD-2000008-01


8

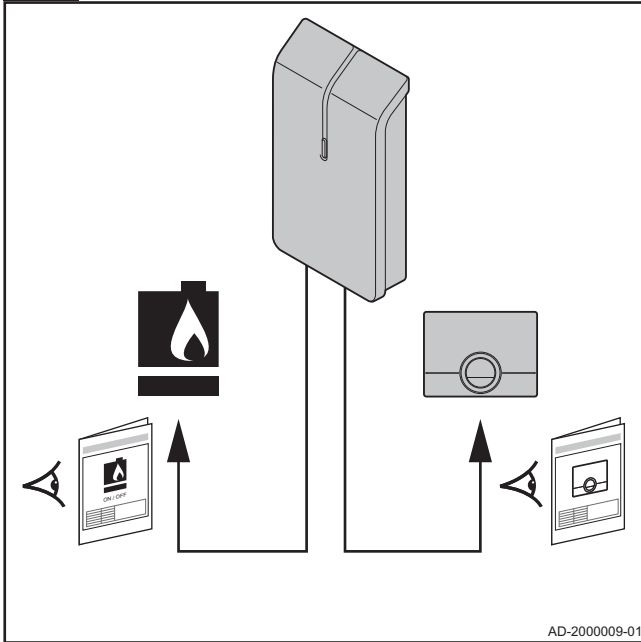

9

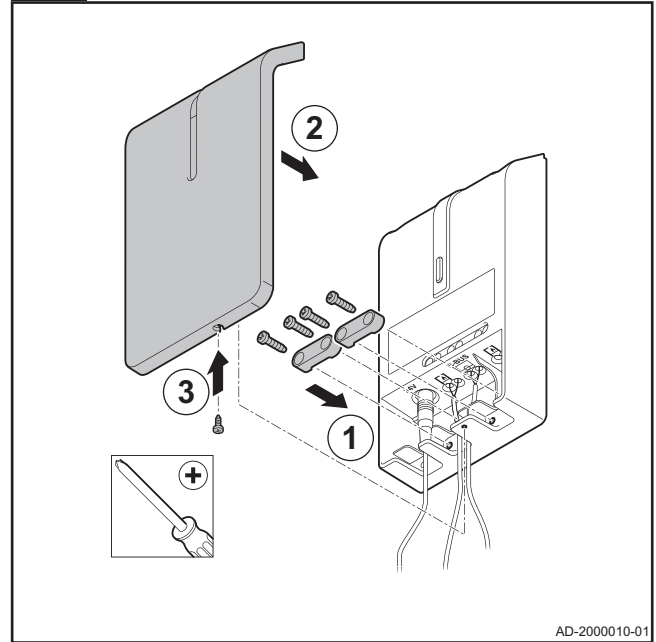

10

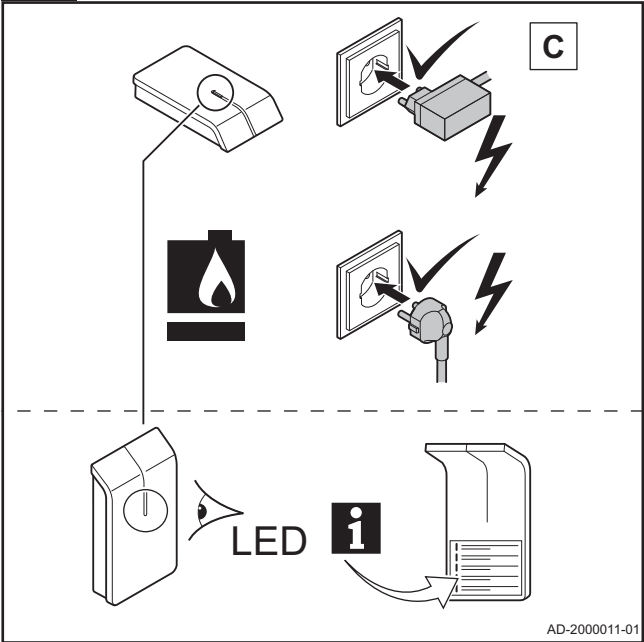

© Copyright

All technical and technological information contained in these technical instructions, as well as any drawings and technical descriptions supplied, remain our property and shall not be multiplied without our prior consent in writing.

Ours is a policy of continuous development. We reserve the right to alter specifications without prior notification.

Subject to alterations

